
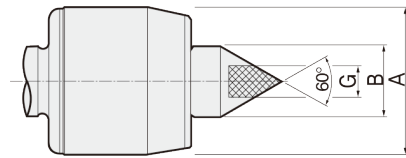


BNH

FEATURES

- Accuracy guaranteed to 0.002mm TIR (0.0001")
- Excellent for CNC, grinder and high speed precision machining.
- High RPM (Up to 6,000)
- Heat-treated point to HRc 60 ± 2
- Based on roller bearings for superior performance.
- Anti-friction seal for coolant deflectors and high speed.
- Heat-treated body for extra strength, rigidity and long life.
- Carbide point available.
- Carbide point to HRa 90 ± 5.

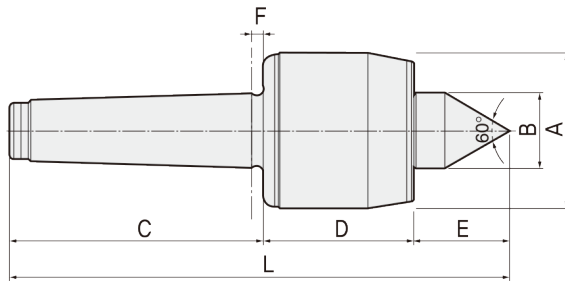

Available Carbide Tipped Points

BNHC-TYPE

- MT3: 032003
- MT4: 032004
- MT5: 032005

Dimension

Unit: mm. kg

MODEL	MT	A	B	C	D	E	F	G	L	Workpiece Weight	Max, R.P.M	Weight	Max, Run Out
031003 (032003)	3	50	22	85	51.5	26	4.5	10	162.5	750	6,000	1.8	0.002
031004 (032004)	4	66	32	108	64	41	5.3	14	213	1,500	6,000	2.2	0.002
031005 (032005)	5	80	40	136	70	41	6.3	18	247	2,600	5,000	5.2	0.002

*(MODEL NO) : Carbide Tip Type

BNH type Technical data

- 3BNH
- 4BNH
- 5BNH

